


rovatti pompe

Products you can rely on

Pompe | Pumps | Pompes | Pumpen | Bombas

General overview

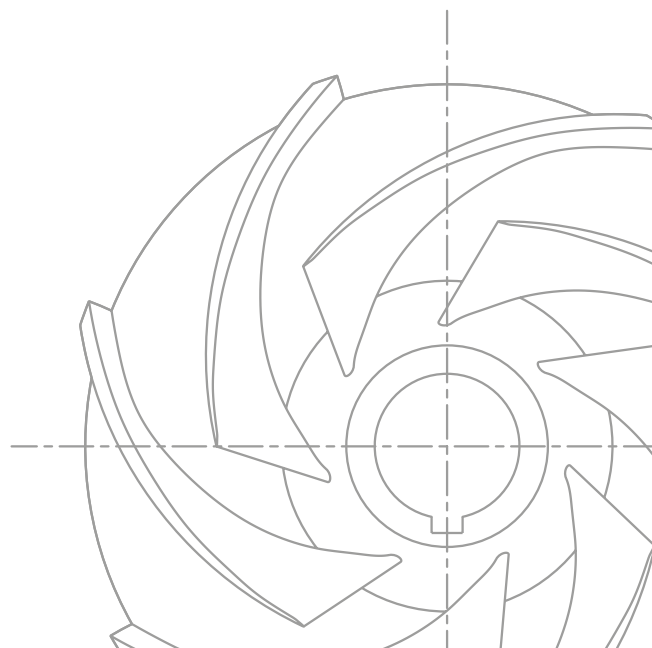

A powerful team in the world

- Rovatti Pompe is the right partner of every Company around the world because is able to respond quickly and efficiently to the rapid market trends. The wide range of centrifugal pumps produced, the well-established experience in the field and the continuous production quality improvement summarize the potential fielded by the Company. The value of the employees finally complete the driving force behind the entire Rovatti group.



HEADQUARTERS



2000 DIVISION



IPERSOM DIVISION



A Family Company

- Since 1952 Rovatti Pompe manufactures, develops and distributes centrifugal pumps for submersible and surface installations constantly asserting itself as a global leader. The “Family Company” asset enables the group to ensure at all times its customers with high quality products, efficient service and a qualified structure able to provide answers quickly in order to satisfy the markets evolution.


Research and Development

- While an active research and development program focuses on technological innovations and environmental impact, the design of new production processes, the development of advanced technical solutions and the use of new materials allow the Company to steadily improve the efficiency, reliability and maintenance of all products.

Pumps for every purpose

- All Rovatti pumps are manufactured according to international standards and technical specifications of the customer to successfully satisfy many application areas. Technologically innovative products that provide maximum performance with minimum energy consumption, able to offer the highest security level, maintenance-free and ease of use conditions.

INDUSTRY

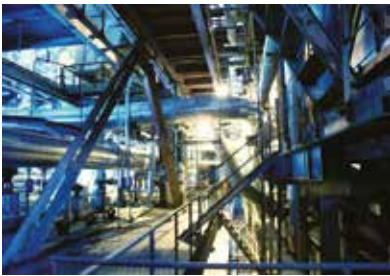

IRRIGATION



WATER SUPPLY



BUILDING SERVICES



WASTE WATER AND DRAINAGE



GROUNDWATER SUPPLY



Typical application areas

- Municipal water supply
- Water supply
- Seawater applications
- Drainage
- Construction site dewatering
- Domestic water supply
- Firefighting
- Conditioning systems
- Treatment plants
- Reverse osmosis systems
- Washdown systems
- Pressure boosting
- Cooling water systems
- Livestock systems
- Snow making systems
- Groundwater supply
- General industry
- Domestic sewage
- Storm water collecting
- Filling tanks and reservoirs
- Irrigation systems
- Spraying systems
- Liquid transfer
- Water treatment

VERTICAL LINESHAFT PUMPS - V SERIES



MULTISTAGE ELECTRIC PUMPS - MEK SERIES



ELECTRIC BOREHOLE PUMPS - E SERIES



Borehole pumps

Electric borehole pumps



4ES

- Radial and mixed-flow wet end centrifugal pumps with incorporated retaining valve and stainless steel external casing

Q max 27 m³/h

H Max 415 m

P₂ Max 5,5 kW

Min. well diameter 4"

Features

- Thermoplastic resin hydraulic components
- Sturdy delivery bowl and suction bowl in AISI 304 stainless steel
- Light pump
- Easy installation
- Coupling flanges according to NEMA norms
- Floating impellers

Typical applications

- Domestic water supply
- Firefighting systems
- Pressure boosting
- Groundwater supply
- Irrigation systems

Electric borehole pumps



ERC-ERCX-EC-ECX

- Radial and mixed-flow wet end centrifugal pumps with incorporated retaining valve and stainless steel external casing

Q max 96 m³/h

H Max 645 m

P₂ Max 75 kW

Min. well diameter 6" ÷ 8"

Features

- Thermoplastic resin hydraulic components
- Versions with cast iron cataphoresis treated delivery bowl and suction bowl
- Versions with stainless steel delivery bowl and suction bowl
- Wide range of models
- Coupling flanges according to NEMA norms

Typical applications

- Domestic water supply
- Water supply
- Pressure boosting
- Groundwater supply
- Irrigation systems

Electric borehole pumps



ER

- Radial wet end centrifugal pumps with incorporated retaining valve

Q max 126 m³/h

H Max 700 m

P₂ Max 110 kW

Min. well diameter 6" ÷ 10"

Features

- Robust cast iron construction
- Locked Impellers by unified keys and shaft protecting spacer bushes
- Maximum operating safety
- Wide range of models
- Coupling flanges according to NEMA norms

Typical applications

- Municipal water supply
- General industry
- Pressure boosting
- Groundwater supply
- Irrigation systems

Electric borehole pumps



ER

- Radial wet end centrifugal pumps in AISI 304 microcasted stainless steel with incorporated retaining valve

Q max 168 m³/h

H Max 700 m

P₂ Max 185 kW

Min. well diameter 8" ÷ 12"

Features

- High head
- Optimal energy consumption
- Corrosion and wear proof
- Coupling flanges according to NEMA norms

Typical applications

- Municipal water supply
- General industry
- Pressure boosting
- Groundwater supply
- Irrigation systems

Electric borehole pumps



E

- Mixed-flow wet end centrifugal pumps with incorporated retaining valve

Q max	1200 m ³ /h
H Max	470 m
P ₂ Max	400 kW
Min. well diameter	6" ÷ 16"

Features

- Reduced energy consumption
- Robust cast iron construction
- Versions with cast iron cathaphoresis treated components
- Locked Impellers by unified keys and shaft protecting spacer bushes
- Wide range of models
- Coupling flanges according to NEMA norms

Typical applications

- Municipal water supply
- General industry
- Pressure boosting
- Groundwater supply
- Irrigation systems

Vertical lineshaft pumps



V

- Vertical lineshaft pumps with flanged drive head for electric motors, with horizontal right angle gear and with overgear driven by tractor p.t.o

Q max	1200 m ³ /h
H Max	310 m
P ₂ Max	200 kW
Min. well diameter	6" ÷ 16"

Features

- Robust cast iron construction
- Wide range of models
- High capacity range
- Locked Impellers by unified keys and shaft protecting spacer bushes
- Available both with mechanical seal or packed gland
- Packed gland version with Twinner System®

Typical applications

- Municipal water supply
- Firefighting systems
- Cooling water systems
- Pressure boosting
- Groundwater supply
- Irrigation systems

Electric borehole pumps



ERCX-EX Extreme

- Radial and mixed-flow wet end centrifugal pumps in AISI 316 microcasted stainless steel with incorporated retaining valve

Q max	1200 m ³ /h
H Max	685 m
P ₂ Max	400 kW
Min. well diameter	8" ÷ 16"

Features

- Reduced energy consumption
- AISI 316 microcasted stainless steel components
- Maximum corrosion and wear proof
- Wide range of models
- High capacity and head range
- Coupling flanges according to NEMA norms

Typical applications

- Municipal water supply
- Seawater applications
- Reverse osmosis systems
- Pressure boosting
- Groundwater supply
- Water treatment

Vertical lineshaft pumps



6VX-8VX Extreme

- Vertical lineshaft pumps in AISI 316 microcasted stainless steel with flanged drive head for IEC motors

Q max	170 m ³ /h
H Max	245 m
P ₂ Max	55 kW
Min. well diameter	6" ÷ 8"

Features

- AISI 316 microcasted stainless steel hydraulic components
- Maximum corrosion and wear proof
- Adjustable cartridge mechanical seal
- Mechanical seal removing without motor disassembling

Typical applications

- Municipal water supply
- Seawater applications
- Reverse osmosis systems
- Pressure boosting
- Groundwater supply
- Water treatment

Surface electric pumps

Vertical close coupled multistage electric pumps

EUROPA



MEKV-MEKDV Europa

- Vertical close coupled multistage centrifugal pumps with IEC motor support. Flanged adjustable ports

Q max	345 m ³ /h
H Max	500 m
P ₂ Max	200 kW
DNa	65 ÷ 150

Features

- Reduced energy consumption
- Modular construction
- Available with: standard mechanical seal, flushed mechanical seal, packed gland
- Packed gland version with Twinner System®
- Easy maintenance with the Rapid Reset Kit
- IEC standard motors

Typical applications

- Municipal water supply
- Water supply
- Conditioning systems
- Washdown systems
- Pressure boosting
- General industry
- Irrigation systems

Horizontal close coupled multistage electric pumps

EUROPA



MEK Europa

- Horizontal close coupled multistage centrifugal pumps with IEC motor support. Axial inlet and adjustable outlet

Q max	300 m ³ /h
H Max	190 m
P ₂ Max	160 kW
DNa	65 ÷ 150

Features

- Reduced energy consumption
- Modular construction
- Available with: standard mechanical seal, flushed mechanical seal, packed gland
- Packed gland version with Twinner System®
- Easy maintenance with the Rapid Reset Kit
- IEC standard motors

Typical applications

- Municipal water supply
- Water supply
- Conditioning systems
- Washdown systems
- Pressure boosting
- General industry
- Irrigation systems

Vertical close coupled multistage electric pumps



MEKVX

- Vertical close coupled multistage centrifugal pumps in AISI 304 microcasted stainless steel with IEC motor support. Flanged adjustable ports

Q max	138 m ³ /h
H Max	200 m
P ₂ Max	55 kW
DNa	80 ÷ 100

Features

- Efficiency at the top of the market
- AISI 304 microcasted stainless steel hydraulic components
- Available both with flushed cartridge mechanical seal and packed gland
- Easy&Fast® flushed cartridge mechanical seal
- Packed gland version with Twinner System®
- Low noise functioning

Typical applications

- Municipal water supply
- Conditioning systems
- Washdown systems
- Pressure boosting
- General industry
- Irrigation systems

Horizontal close coupled multistage electric pumps



MEKX

- Horizontal close coupled multistage centrifugal pumps in AISI 304 microcasted stainless steel with IEC motor support. Axial or radial inlet

Q max	138 m ³ /h
H Max	240 m
P ₂ Max	90 kW
DNa	80 ÷ 100

Features

- Efficiency at the top of the market
- AISI 304 microcasted stainless steel hydraulic components
- Available both with flushed cartridge mechanical seal and packed gland
- Easy&Fast® flushed cartridge mechanical seal
- Packed gland version with Twinner System®
- Low noise functioning

Typical applications

- Municipal water supply
- Conditioning systems
- Washdown systems
- Pressure boosting
- General industry
- Irrigation systems

Vertical close coupled multistage electric pumps



MEKV65 (I-X)

- Vertical close coupled multistage centrifugal pumps with IEC motor support. Flanged in-line ports

Q max	78 m ³ /h
H Max	270 m
P ₂ Max	37 kW
DN	65

Features

- AISI 316 microcasted stainless steel hydraulic components (MEKVX65)
- AISI 304 microcasted stainless steel hydraulic components (MEKV65)
- Thermoplastic resin hydraulic components (MEKV65)
- Available both with mechanical seal or packed gland
- Packed gland version with Twinner System®

Typical applications

- Seawater applications
- Reverse osmosis systems
- Pressure boosting
- General industry
- Irrigation systems
- Water treatment

Vertical close coupled multistage electric pumps



MEKV50T-MEKV50C

- Vertical close coupled multistage centrifugal pumps with IEC motor support

Q max	39 m ³ /h
H Max	285 m
P ₂ Max	22 kW
DN	2" GAS

Features

- Thermoplastic resin hydraulic components
- Maximum operating safety
- Equipped with mechanical seal
- Easy installation
- Compact and light pump
- Threaded in-line ports (MEKV50T)
- Threaded overlapping ports (MEKV50C)

Typical applications

- Conditioning systems
- Washdown systems
- Pressure boosting
- General industry
- Irrigation systems

EN733 compliant horizontal close coupled electric pumps



MNE

- Horizontal close coupled single-stage centrifugal pumps in compliance with EN733 standards. Coupled to electric motors through rigid coupling

Q max	470 m ³ /h
H Max	145 m
P ₂ Max	90 kW
DNm	32 ÷ 125

Features

- Efficiency at the top of the market
- Available both with mechanical seal or packed gland
- Packed gland version with Twinner System®
- IEC standard motors
- Easy maintenance

Typical applications

- Water supply
- Firefighting systems
- Conditioning systems
- Cooling water systems
- General industry
- Irrigation systems

Horizontal close coupled single-stage electric pumps



MEW

- Horizontal close coupled single-stage centrifugal pumps with keyed impeller on motor shaft

Q max	180 m ³ /h
H Max	65 m
P ₂ Max	22 kW
DNm	32 ÷ 80

Features

- Robust and compact cast iron construction
- Equipped with Twinner System®
- Easy installation

Typical applications

- Water supply
- Domestic water supply
- Irrigation systems

Surface pumps

EN733 compliant pumps



Pumps exceeding EN733



Horizontal single-stage pumps



EN733 compliant pumps



SNE

- Single-stage bareshaft centrifugal pumps in compliance with EN733 standards

Q max 725 m³/h

H Max 150 m

P₂ Max 162 kW

DNm 32 ÷ 150

SNE

- Single-stage bareshaft centrifugal pumps with characteristics exceeding EN733 standards

Q max 1300 m³/h

H Max 110 m

P₂ Max 315 kW

DNm 150 ÷ 250

SNF

- Single-stage bareshaft centrifugal pumps with performance in compliance with EN733 standards. Adjustable outlet

Q max 600 m³/h

H Max 150 m

P₂ Max 162 kW

DNm 32 ÷ 125

SNX

- Single-stage bareshaft centrifugal pumps in compliance with EN733 standards in AISI 316 microcasted stainless steel

Q max 115 m³/h

H Max 140 m

P₂ Max 55 kW

DNm 50

Features

- Efficiency at the top of the market
- Microcasted stainless steel or carbon steel impellers
- Back pull-out design
- Multiple bearings lubrication options
- Available both with mechanical seal or packed gland
- Packed gland version with Twinner System®

Features

- Efficiency at the top of the market
- Microcasted stainless steel or carbon steel impellers
- Back pull-out design
- Multiple bearings lubrication options
- High capacity range
- Available both with mechanical seal or packed gland
- Packed gland version with Twinner System®

Features

- Efficiency at the top of the market
- Microcasted stainless steel or carbon steel impellers
- Multiple bearings lubrication options
- Available both with mechanical seal or packed gland
- Packed gland version with Twinner System®

Features

- Maximum corrosion and wear proof
- Reduced energy consumption
- Wide range of applications
- Back pull-out design

Typical applications

- Water supply
- Firefighting systems
- Conditioning systems
- Cooling water systems
- General industry
- Irrigation systems

Typical applications

- Water supply
- Firefighting systems
- Conditioning systems
- Cooling water systems
- General industry
- Irrigation systems

Typical applications

- Water supply
- Conditioning systems
- General industry
- Irrigation systems

Typical applications

- Water supply
- Firefighting systems
- Conditioning systems
- Cooling water systems
- General industry
- Irrigation systems

Horizontal multistage pumps



SK

- Multistage bareshaft centrifugal pumps with axial inlet for high pressure

Q max	300 m ³ /h
H Max	200 m
P ₂ Max	130 kW
DNa	50 ÷ 150

Features

- Robust cast iron construction
- Available both with mechanical seal or packed gland
- Packed gland version with Twinner System®
- Application flexibility

Typical applications

- Water supply
- Washdown systems
- Pressure boosting
- Irrigation systems

Horizontal multistage pumps

EUROPA



SK Europa

- Multistage bareshaft centrifugal pumps with axial inlet for high pressure

Q max	285 m ³ /h
H Max	265 m
P ₂ Max	140 kW
DNa	65 ÷ 150

Features

- Reduced energy consumption
- Available both with mechanical seal or packed gland
- Packed gland version with Twinner System®
- Application flexibility
- Easy maintenance with the Rapid Reset Kit

Typical applications

- Water supply
- Washdown systems
- Pressure boosting
- Snow making systems
- General industry
- Irrigation systems

Horizontal multistage pumps with double support

EUROPA



SKD Europa

- Multistage bareshaft centrifugal pumps for high pressure with double bearing support

Q max	360 m ³ /h
H Max	500 m
P ₂ Max	330 kW
DNa	65 ÷ 150

Features

- Reduced energy consumption
- Multiple bearings lubrication options
- Available both with mechanical seal or packed gland
- Packed gland version with Twinner System®
- Easy maintenance with the Rapid Reset Kit

Typical applications

- Water supply
- Washdown systems
- Pressure boosting
- Snow making systems
- General industry
- Irrigation systems

Horizontal single-stage pumps



S-SQ-SP

- Single-stage bareshaft centrifugal pumps for low and medium pressure. Axial inlet and scroll outlet

Q max	1020 m ³ /h
H Max	130 m
P ₂ Max	120 kW
DNa	50 ÷ 250

Features

- Robust cast iron construction
- Low NPSH
- High capacity range
- Application flexibility
- Wide range of models

Typical applications

- Water supply
- Irrigation systems
- Filling tanks and reservoirs
- Liquid transfer

Surface pumps

SAE flanged pumps for thermic engines

EUROPA



SAE flanged pumps for thermic engines exceeding EN733



SAE flanged pumps for thermic engines



Flanged pumps for thermic engines



FK-FK Europa

- Multistage centrifugal pumps for direct coupling to thermic engines with SAE flange

Q max	300 m ³ /h
H Max	220 m
P ₂ Max	130 kW
DNa	65 ÷ 150

FNSF

- Single-stage centrifugal pumps for direct coupling to thermic engines with SAE flange

Q max	1300 m ³ /h
H Max	115 m
P ₂ Max	250 kW
DNa	200 ÷ 300

FS-FQ-FP

- Single-stage centrifugal pumps for direct coupling to thermic engines with SAE flange for low and medium pressure

Q max	1020 m ³ /h
H Max	105 m
P ₂ Max	105 kW
DNa	65 ÷ 250

FL

- Single-stage and 2 stage centrifugal pumps for direct coupling to thermic engines. Axial inlet and scroll outlet

Q max	215 m ³ /h
H Max	115 m
P ₂ Max	38 kW
DNa	50 ÷ 100

Features

- Robust cast iron construction
- Available both with mechanical seal or packed gland
- Packed gland version with Twinner System®
- Application flexibility
- Easy maintenance with the Rapid Reset Kit

Features

- Efficiency at the top of the market
- Microcasted stainless steel or carbon steel impellers
- High capacity range
- Available both with mechanical seal or packed gland
- Packed gland version with Twinner System®

Features

- Robust cast iron construction
- Low NPSH
- High capacity range
- Application flexibility
- Wide range of models

Features

- Wide range of models
- Robust and compact cast iron construction
- Reduced overall dimensions and weights
- Easy installation
- Application flexibility

Typical applications

- Firefighting systems
- Irrigation systems
- Spraying systems
- Liquid transfer

Typical applications

- Water supply
- Irrigation systems
- Filling tanks and reservoirs
- Liquid transfer

Typical applications

- Water supply
- Irrigation systems
- Filling tanks and reservoirs
- Liquid transfer

Typical applications

- Firefighting systems
- Filling tanks and reservoirs
- Spraying systems
- Liquid transfer

Multistage pumps with overgear

EUROPA



Single-stage pumps with overgear



Single-stage pumps with overgear



Single-stage pumps with overgear



TK-TK Europa

- Multistage centrifugal pumps with overgear driven by cardan shaft of PTO. Axial inlet and scroll outlet

Q max	210 m ³ /h
H Max	170 m
P ₂ Max	77 kW
DNa	50 ÷ 100

TO-TOF-TOA-TOFA

- Compact pumps with overgear driven by cardan shaft or for direct connection to tractor PTO. Available both in centrifugal and self-priming execution

Q max	30 m ³ /h
H Max	40 m
P ₂ Max	6,7 kW
DNa	2" GAS

T

- Single-stage centrifugal pumps with overgear driven by cardan shaft of PTO. Axial inlet and scroll outlet

Q max	330 m ³ /h
H Max	135 m
P ₂ Max	88 kW
DNa	65 ÷ 125

MB

- Single-stage centrifugal pumps with overgear driven by cardan shaft of PTO. Axial inlet and scroll outlet

Q max	1000 m ³ /h
H Max	25 m
P ₂ Max	40 kW
DNa	200 ÷ 250

Features

- Robust cast iron construction
- Equipped with tested overgear water circulation cooling device
- Available both with mechanical seal or packed gland
- Packed gland version with Twinner System® (TK Europa)
- Available with trolleys and three-point linkage

Features

- Light and compact pump
- Easy installation
- Application flexibility
- Available in self-priming execution
- Available with trolleys and three-point linkage

Features

- Robust cast iron construction
- Equipped with tested overgear water circulation cooling device
- Available both with mechanical seal or packed gland
- Application flexibility
- Available with trolleys and three-point linkage

Features

- Robust cast iron construction
- Available both with mechanical seal or packed gland
- High capacity range
- Application flexibility
- Available with trolleys and three-point linkage

Typical applications

- Livestock systems
- Filling tanks and reservoirs
- Irrigation systems
- Spraying systems
- Liquid transfer

Typical applications

- Filling tanks and reservoirs
- Irrigation systems
- Spraying systems
- Liquid transfer

Typical applications

- Livestock systems
- Filling tanks and reservoirs
- Irrigation systems
- Spraying systems
- Liquid transfer

Typical applications

- Livestock systems
- Water supply
- Irrigation systems
- Filling tanks and reservoirs
- Liquid transfer

Electric submersible pumps

Waste water electric submersible pumps



RHM

- Electric submersible pumps with single-channel impellers for free wet installations or with automatic connection foot

Q max	210 m ³ /h
H Max	45 m
P ₂ Max	11,5 kW
DN	65 ÷ 100

Features

- Single-channel impellers
- Double mechanical seal
- Oil chamber infiltrations control probe and winding temperature control probe
- Maximum operating safety
- Large solids passage

Typical applications

- Treatment plants
- Livestock systems
- General industry
- Storm water collecting
- Liquid transfer
- Irrigation systems

Waste water electric submersible pumps



RHV

- Electric submersible pumps with vortex impellers for free wet installations or with automatic connection foot

Q max	200 m ³ /h
H Max	20 m
P ₂ Max	9,5 kW
DN	65 ÷ 100

Features

- Vortex impellers
- Double mechanical seal
- Oil chamber infiltrations control probe and winding temperature control probe
- Maximum operating safety
- Maximum solids passage

Typical applications

- Treatment plants
- Livestock systems
- General industry
- Storm water collecting
- Liquid transfer
- Irrigation systems

Waste water electric submersible pumps



RHB

- Electric submersible pumps with double-channel impellers for free wet installations or with automatic connection foot

Q max	475 m ³ /h
H Max	25 m
P ₂ Max	22 kW
DN	150

Features

- Double-channel impellers
- Double mechanical seal
- Oil chamber infiltrations control probe and winding temperature control probe
- Maximum operating safety
- Large solids passage

Typical applications

- Treatment plants
- Livestock systems
- General industry
- Storm water collecting
- Liquid transfer
- Irrigation systems

Electric submersible pumps for sewage



HS

- Electric submersible pumps with vortex impellers for pumping clean water or sewage with small residual solids

Q max	50 m ³ /h
H Max	20 m
P ₂ Max	2,2 kW
DN	1" ½ ÷ 2" GAS

Features

- Vortex impellers
- Capacitor standard supplied in single-phase version
- Thermal protection standard supplied in single-phase version
- Light and compact pump
- Easy installation

Typical applications

- Storm water collecting
- Domestic sewage
- Liquid transfer
- Domestic drainage

Horizontal single-stage pumps



SL-SD

- Single-stage bareshaft centrifugal pumps. Open impeller with interchangeable wear plate

Q max	190 m ³ /h
H Max	120 m
P ₂ Max	73 kW
DNa	80 ÷ 150 / 2" ½ ÷ 3" ½

Features

- Robust cast iron construction
- Available with different priming systems
- Available with optional chopper device
- Available both with mechanical seal or packed gland

Typical applications

- Livestock systems
- Irrigation systems
- Liquid transfer
- Filling tanks and reservoirs

Horizontal single-stage pumps



SLK-SLKC

- Single-stage bareshaft centrifugal pumps. Open impeller with interchangeable wear plate and chopper cone

Q max	240 m ³ /h
H Max	120 m
P ₂ Max	92 kW
DNa	150

Features

- Robust cast iron construction
- Available with different priming systems
- Cast iron or galvanized chopper cone
- Available both with mechanical seal or packed gland

Typical applications

- Livestock systems
- Irrigation systems
- Liquid transfer
- Filling tanks and reservoirs

Single-stage pumps with overgear



TL

- Single-stage centrifugal pumps with overgear driven by cardan shaft of PTO. Open impeller with interchangeable wear plate

Q max	190 m ³ /h
H Max	130 m
P ₂ Max	77 kW
DNa	80 ÷ 150

Features

- Robust cast iron construction
- Available with different priming systems
- Available with optional chopper device
- Available both with mechanical seal or packed gland
- Available with trolleys and three-point linkage

Typical applications

- Livestock systems
- Irrigation systems
- Liquid transfer
- Filling tanks and reservoirs

Single-stage pumps with overgear



TLK-TLKC

- Single-stage centrifugal pumps with overgear driven by cardan shaft of PTO. Open impeller with interchangeable wear plate and chopper cone

Q max	230 m ³ /h
H Max	120 m
P ₂ Max	92 kW
DNa	150

Features

- Robust cast iron construction
- Available with different priming systems
- Cast iron or galvanized chopper cone
- Available both with mechanical seal or packed gland
- Available with trolleys and three-point linkage

Typical applications

- Livestock systems
- Irrigation systems
- Liquid transfer
- Filling tanks and reservoirs

Pumps for sewage and slurry

Self-priming close coupled electric pumps



MEA

- Self-priming close coupled centrifugal pumps directly coupled to electric motors

Q max	120 m ³ /h
H Max	75 m
P ₂ Max	22 kW
DNa	1" ½ ÷ 4" GAS

Features

- Robust cast iron construction
- Open impeller with interchangeable wear plate
- Equipped with mechanical seal
- Easy installation
- Application flexibility

Typical applications

- Construction site dewatering
- Washdown systems
- Spraying systems
- Liquid transfer

Self-priming bareshaft pumps



SA

- Self-priming bareshaft centrifugal pumps driven by electric motors

Q max	155 m ³ /h
H Max	70 m
P ₂ Max	22 kW
DNa	1" ½ ÷ 5" GAS

Features

- Robust cast iron construction
- Open impeller with interchangeable wear plate
- Equipped with mechanical seal
- Easy installation
- Application flexibility

Typical applications

- Construction site dewatering
- Washdown systems
- Spraying systems
- Liquid transfer

Self-priming flanged pumps



FLA

- Self-priming centrifugal pumps for direct coupling to thermic engines

Q max	70 m ³ /h
H Max	40 m
P ₂ Max	6,8 kW
DNa	1" ½ ÷ 3" GAS

Features

- Robust cast iron construction
- Open impeller with interchangeable wear plate
- Equipped with mechanical seal
- Easy installation
- Application flexibility

Typical applications

- Construction site dewatering
- Washdown systems
- Spraying systems
- Liquid transfer

A complete set of web-based resources at your disposal

WWW.ROVATTI.IT



ROVATTI SELECTOR




Online solution for the quick selection of the most suitable pump according to your requirements

ROVATTI SPARES PRO



The online spare-parts catalog to easily identify the right spare at the right time

DWG LIBRARY

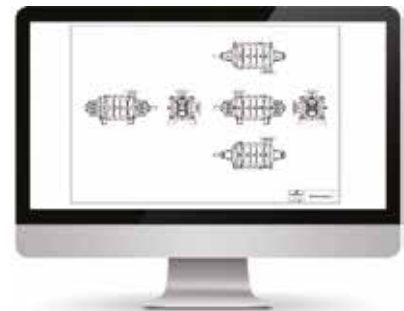

A complete set of DWG drawings of Rovatti pumps, always available online

DOCUMENTATION



Technical catalogs can be downloaded in pdf format, always available online

PRESS



Read the newsletters and the most important releases on the main sector magazines

NEWS AND EVENTS



Keep updated on the news from Rovatti Group: new products, exhibitions, events and much more

rovatti pompe

Products you can rely on

Rovatti Pompe s.p.a. reserves the right to make changes without prior notice



HEADQUARTERS:

42042 FABBRICO (REGGIO EMILIA)
ITALY
Tel +39 0522 66 50 00
Fax +39 0522 66 50 20
info@rovatti.it
www.rovatti.it

2000 DIVISION:

42047 ROLO (REGGIO EMILIA)
ITALY
Tel +39 0522 66 72 17 / 0522 66 72 25
Fax +39 0522 66 09 79
info@rovatti.it
www.rovatti.it

IPERSOM DIVISION:

42042 FABBRICO (REGGIO EMILIA)
ITALY
Tel +39 0522 66 08 15
Fax +39 0522 66 02 70
info@rovatti.it
www.rovatti.it

ROVATTI FRANCE:

91124 Z.A. LES GLAISES - PALAISEAU
FRANCE
Tel +33 1 69 20 57 35
Fax +33 1 69 20 74 04
info@rovatti.fr
www.rovatti.fr

BG0186R6

